

Bomba centrífuga multietapa in-line

MULTI VE 94



Aplicaciones

Bombeo de aguas limpias para uso doméstico, industrial, agrícola y jardinería.

Materiales

Cuerpo bomba e impulsores en AISI 304.

Eje bomba en AISI 420.

Difusores en tecnopolímero.

Aspiración, impulsión y acoplamiento motor-hidráulica en fundición.

Cierre mecánico.

Carcasa motor en aluminio.

Juntas en NBR/EPDM.

Equipamiento

Sin cable. Contrabridas y juntas incluidas. Acoplamiento motor-hidráulica sistema V18-brida C (Estándar IEC).

Motor

Asíncrono 2 polos. Protección IPX4. Aislamiento clase F.

Servicio continuo.

Rango de uso

Temperatura máxima del agua 40 °C.

Caudal hasta 225 l/min

Presión hasta 135 m




Modelos

	I [A]			P1	P2		l/min 0 50 100 125 150 175 200 225
	3~ 220V	3~ 440V	3~ 692V	[kW]	[kW]	[HP]	
VE 94 6	6,7	3,9	-	2,3	1,5	2	58 55 49 44 38 31 22 13
VE 94 8	8,9	5,2	-	3	2,2	3	77 73 63 56 49 40 30 18
VE 94 10	11,7	6,8	-	3,9	3	4	95 91 81 72 62 50 36 22
VE 94 11	12,4	7,2	-	4,4	3	4	108 102 91 82 70 56 42 26
VE 94 13	-	8,6	5	5	4	5,5	125 120 107 97 85 68 51 32
VE 94 14	-	9,7	5,4	5,5	5,5	7,5	135 129 118 109 95 77 57 35

MULTI VE 94



Modelo	A	B	C	D	E	F	G	Kg
VE 94 6	486	738	176	127	200	190	155	35
VE 94 8	563	838	176	127	200	190	155	47
VE 94 10	666	974	194	138	280	190	155	61
VE 94 11	703	1010	194	138	280	190	155	62
VE 94 13	780	1086	194	138	280	190	155	68
VE 94 14	816	1134	220	146	280	190	155	76

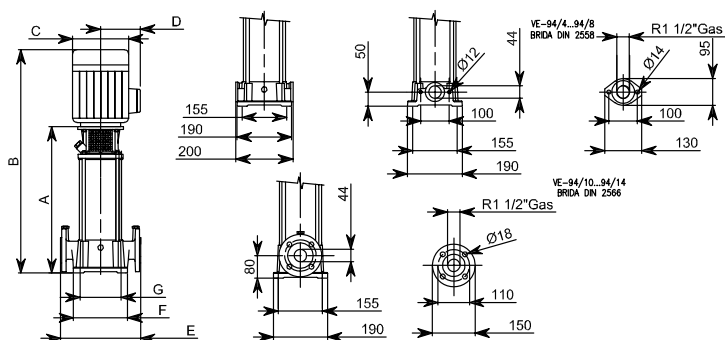

The graph displays the performance curves for the 100-100-1000 pump. The vertical axis represents head (H) in meters [m] and feet [ft]. The horizontal axis represents flow rate (Q) in liters per minute [l/min] and cubic meters per hour [m³/h]. The curves are labeled with impeller diameters in inches (6, 8, 10, 11, 13, 14). The curves show that as the impeller diameter increases, the head capacity of the pump increases across the entire flow range.