


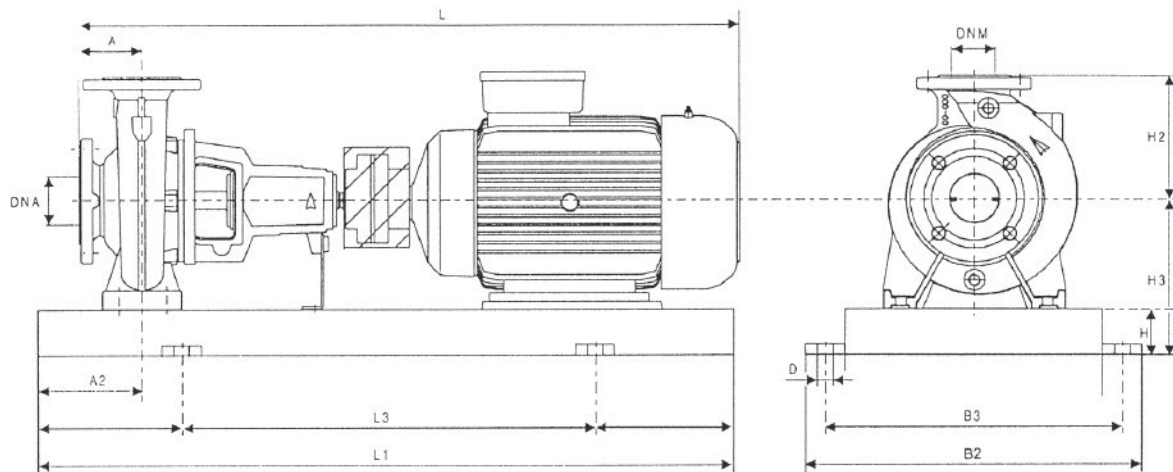

Modelo	Potencia	Dimensiones (mm)													
	CV	DNA	DNM	A	A2	D	H2	H3	L	L1	L2	L3	B1	B2	B3
KDN 32-125.1	0,5	50	32	80	60	M16	140	177	820	800	130	540	270	360	320
	0,75														
KDN 32-125	0,5	50	32	80	60	M16	140	177	820	800	130	540	270	360	320
	0,75														
KDN 32-160.1	0,5	50	32	80	60	M16	160	197	740	800	130	540	270	360	320
	0,75														
	1														
KDN 32-160	0,5	50	32	80	60	M16	160	197	740	800	130	540	270	360	320
	0,75														
	1														
	1,5														
KDN 32-200.1	0,5	50	32	80	60	M16	180	225	820	800	130	540	270	360	320
	0,75														
	1														
	1,5														
KDN 32-200	0,75	50	32	80	60	M16	180	225	820	800	130	540	270	360	320
	1														
	1,5														
	2														
	3	50	32	80	60	M16	180	225	840	900	150	600	300	390	350
KDN 40-125	0,5	65	40	80	60	M16	140	177	820	800	130	540	270	360	320
	0,75														
	1														
	1,5														
KDN 40-160	0,5	65	40	80	60	M16	160	197	820	800	130	540	270	360	320
	0,75														
	1														
	1,5														
KDN 40-200	2	65	40	80	60	M16	160	197	920	900	150	600	300	390	350
	0,75	65	40	100	60	M16	180	225	940	900	150	600	300	390	350
	1														
	1,5														
	2														
KDN 40-250	3	65	40	100	75	M20	180	260	1025	1000	170	660	340	450	400
	2														
	3														
	4														
	5,5														

Modelo	Potencia	Dimensiones (mm)													
	CV	DNA	DNM	A	A2	D	H2	H3	L	L1	L2	L3	B1	B2	B3
KDN 50-125	0,5	65	50	100	60	M16	160	197	840	800	130	540	270	360	320
	0,75														
	1														
	1,5														
KDN 50-160	0,75	65	50	100	60	M16	180	225	940	900	150	600	300	390	350
	1														
	1,5														
	2														
	3														
KDN 50-200	1,5	65	50	100	60	M16	200	225	940	900	150	600	300	390	350
	2														
	3														
	4														
	5,5														
KDN 50-250	3	65	50	100	75	M16	225	260	1025	1000	170	660	340	450	400
	4														
	5,5	65	50	100	75	M20	225	260	1145	1120	190	740	380	490	440
	7,5														
KDN 65-125	0,75	80	65	100	60	M16	180	225	940	900	150	600	300	390	350
	1														
	1,5														
	2														
KDN 65-160	1	80	65	100	60	M16	200	225	940	900	150	600	300	390	350
	1,5														
	2														
	3														
	4														
KDN 65-200	2	80	65	100	75	M20	225	260	1025	1000	170	660	340	450	400
	3	80	65	100	75	M20	225	260	1145	1120	190	740	380	490	440
	4														
	5,5														
	7,5														
KDN 65-250	4	80	65	100	90	M20	250	280	1130	1120	190	740	380	490	440
	5,5														
	7,5														
	10														
KDN 65-315	7,5	80	65	125	90	M20	280	325	1285	1250	205	840	430	540	490
	10														
	15														
	20					M24	280	325	1435	1400	230	940	480	610	550

Modelo	Potencia	Dimensiones (mm)													
	CV	DNA	DNM	A	A2	D	H2	H3	L	L1	L2	L3	B1	B2	B3
KDN 80-160	2	100	80	125	75	M20	225	260	1050	1000	170	660	340	450	400
	3														
	4														
	5,5														
KDN 80-200	4	100	80	125	75	M20	250	260	1170	1120	190	740	380	490	440
	5,5														
	7,5														
	10														
KDN 80-250	7,5	100	80	125	90	M22	280	280	1285	1250	205	840	430	540	490
	10														
	15														
	20														
KDN 80-315	15	100	80	125	90	M20	315	350	1285	1250	205	840	430	540	490
	20	100	80	125	90	M24	315	350	1435	1400	230	940	480	610	550
	25														
	30														
	40														
KDN 100-200	7,5	125	100	125	90	M20	280	280	1155	1120	190	740	380	490	440
	10														
	15	125	100	125	90	M20	280	280	1285	1250	205	840	430	540	490
KDN 100-250	10	125	100	140	90	M20	280	305	1300	1250	205	840	430	540	490
	15														
	20	125	100	140	90	M24	280	325	1450	1400	230	940	480	610	550
	25														
KDN 100-315	15	125	100	140	90	M20	315	350	1300	1250	205	840	430	540	490
	20	125	100	140	90	M24	315	350	1450	1400	230	940	480	610	550
	25														
KDN 125-250	15	150	125	140	90	M20	355	350	1300	1250	205	840	430	540	490
	20														
	25	150	125	140	90	M24	355	350	1450	1400	230	940	480	610	550
	30														
	40														
KDN 150-200	15	200	150	160	110	M24	400	350	1850	1800	300	1200	600	730	670
	20														